

Travel with Tugger Quilt

46"x55"

by Cheryl A. Adam



featuring fabric from Tugger collection
by Animated Family Films



TRAVEL WITH TUGGER QUILT

46"Wx55"L

By Cheryl A. Adam

Fabric Requirements

<u>Yardage</u>	<u>Fabric</u>	<u>Cutting Instructions</u>
1	AF14 Tugger Pillow panel	Qty 1-16" x 16"
1yd	AF-17 Blue	Qty 12- Template A Qty 12- Template B
¾yd	AF-16 Red	Qty 4-1 ½ x WOF Qty 6- desired width x WOF for binding
½yd	AF-19 Blue	Qty 4-9 ½" x 9 ½"
½yd	AF-23 Yellow	Qty 12- template C Qty 3-4 ¼" x WOF
½yd	AF-20 Blue	Qty 3-4 ¼" x WOF
1/8yd	AF-18 Yellow	Qty 2-1 ¾" x 16" Qty 2-1 ¾" x 18 ½"
1/8yd	AF-22 Red	Qty 12-Template C
1/8yd	AF-16 Yellow	Qty 12-Template C
1/8yd	AF-18 Red	Qty 12-Template C
3yds 50"x60"	Backing Fabric Batting	Qty 2-1 ½yd pieces

All seam allowances are ¼" unless noted
WOF=width of fabric

"Road" Block Assembly

1. Sew a template C of AF-23, AF-22, AF-16, and AF-18 together along the long edge, making sure the wide curved sides of the pieces are all on the same side. This will form a fan. Press.

2. Clip curves and sew template A to the small curve of the fan and template B to the large curve of the fan. (Hint: mark the points where the fan seams intersect template A and B to make it easy to sew the curve). Press.
3. Repeat 11 more times to make the 12 “Road” blocks.

Center Panel Assembly

1. Sew the 2, 1 $\frac{3}{4}$ ”x16” pieces of AF-18 yellow to opposite sides of the 16”x16” pillow panel. Press.
2. Sew the 2, 1 $\frac{3}{4}$ ”x18 $\frac{1}{2}$ ” pieces of AF-18 yellow to the remaining 2 sides of the pillow panel. Press.

Quilt Center Assembly


1. Using the quilt picture as a guide, layout the quilt center.
2. Sew the rows of the quilt together. (Hint: The row with the pillow panel will have 2-9 $\frac{1}{2}$ ” blocks sewn on top of each other on either side of the panel.) Press.
3. Sew the rows together to make the quilt center. Press.

Add the Borders

1. Sew the 4, 1 $\frac{1}{2}$ ” x WOF together into one long strip. From this strip cut qty 2-1 $\frac{1}{2}$ ”x38 $\frac{1}{2}$ ” and qty 2-1 $\frac{1}{2}$ ”x45 $\frac{1}{2}$ ”.
2. Sew the 1 $\frac{1}{2}$ ”x45 $\frac{1}{2}$ ” to the sides of the quilt center. Press.
3. Sew the 1 $\frac{1}{2}$ ”x38 $\frac{1}{2}$ ” to the top and bottom of the quilt center. Press.
4. Sew the 4, 4 $\frac{1}{4}$ ”x WOF together into one long strip. From this strip cut qty 2-4 $\frac{1}{4}$ ”x47 $\frac{1}{2}$ ” and qty 2-4 $\frac{1}{4}$ ”x46”.
5. Sew the 4 $\frac{1}{4}$ ”x47 $\frac{1}{2}$ ” to the sides of the quilt center. Press.
6. Sew the 4 $\frac{1}{4}$ ”x46” to the top and bottom of the quilt center. Press.

Finishing

1. Sew the two, 1 $\frac{1}{2}$ yd pieces together along the selvedge edge to make the backing.
2. Layer the backing, batting, and quilt top. Quilt by hand or machine, as desired.
3. Sew the binding strips together to form one long strip. Fold the binding in half, lengthwise, with wrong sides together and press. Sew the raw edges of the binding to the edges of the right side of the quilt. Turn the folded edge of the binding to the back side of the quilt and stitch in place by hand, mitering the corners.

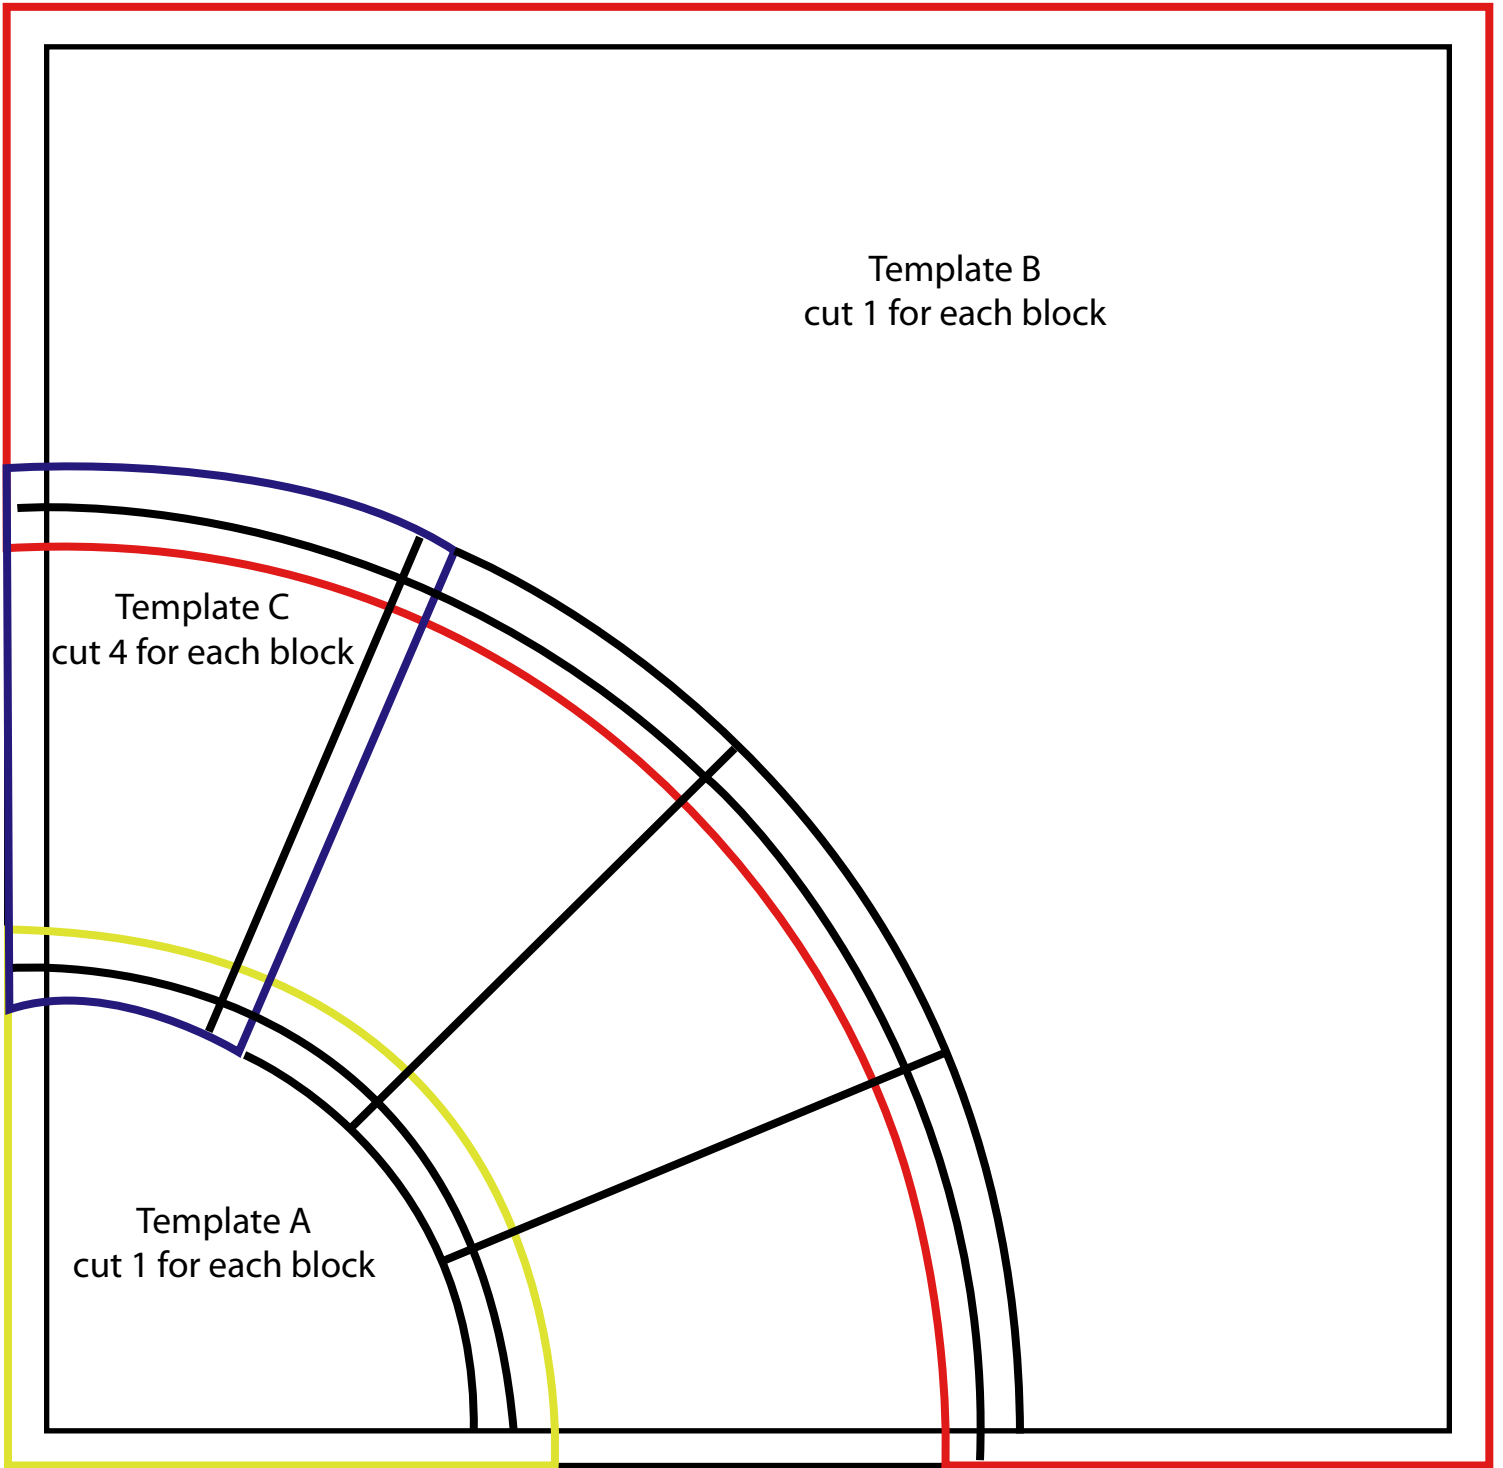

Enlarge 20%